

Specification Sheet

SL415HF-2

Fouling Resistance Type of Polyamide Reverse Osmosis Membrane Element

■ **Application**

- Production wastewater treatment, reclaimed water recycle, sewage wastewater treatment etc.
- Industrial applications for power, steel, electroplating, petrochemical, coal to chemicals, textile and dyeing, pulp&Papermaking, landfill leachate etc.
- Feed TDS below 8,000 mg/L

■ **Specification**

Membrane Surface Area(Nominal)	7.9 m² (85 ft²)	
Feed spacer thickness	34 mil	
Permeate flow	8.7 m³/d (2,300 GPD)	*1, *2
Nominal Salt Rejection	99.6%	*1
Minimum Salt Rejection	99.5%	*1

(*1) Test condition : Feed Pressure 1.55 MPa (225 psi), Temperature 25 deg. C,

Feed water concentration 2,000 mg/L as NaCl, Recovery ratio 15%, Feed water pH 7.5 - 8.0


(*2) Individual permeate flow rate may vary +/- 15%

■ **Operating limits**

Maximum Pressure	4.14 MPa (600 psi)
Maximum Temperature	45 °C
Maximum Feed water SDI₁₅	5
Maximum Feed water flow	3.6 m³/hr
pH range during operation	3 - 10
Free chlorine of feed water	Not detectable
Maximum element pressure drop	0.1 MPa (15 psi)

■ **Element Dimension**

A	Outer diameter	99.7 mm (3.9 inch)
B	Length	1,016 mm (40 inch)
C	Diameter of permeate tube	19 mm (0.75 inch)

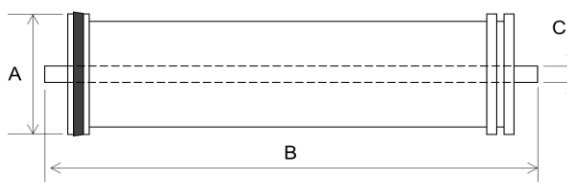

All the information is understood to be subject to change without prior announcement. For more detail, refer to the manual and/or contact us.

TOYOBO MC Corp.

Water Treatment Membrane Sales Unit

Phone: +81-6-6348-3360

E-mail: Membrane@toyobo-mc.jp